




# *Submersible Aerator*

## TRN

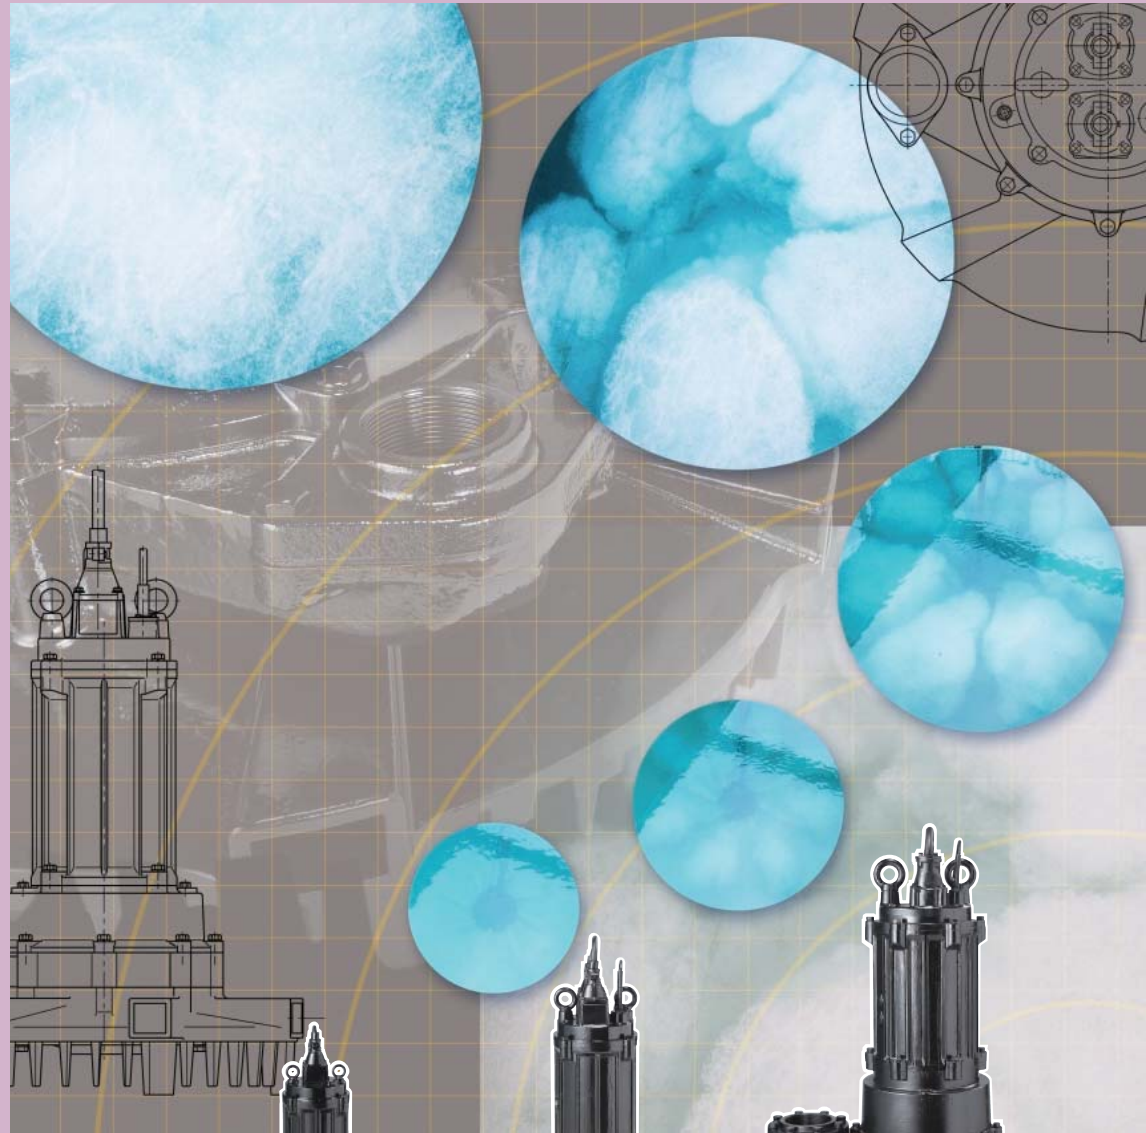

# MODEL TRN

## SUBMERSIBLE AERATOR

### Features of the TRN Series Submersible Aerator

#### Self-Aspirating Design


The specially designed impeller generates negative pressure around itself when rotating. This negative pressure draws in air from above the water surface. As a result, this equipment aerates without the need for a blower. (A blower is required for deep-water aeration.)

In addition, no diffuser piping is required; the aerator requires air intake piping only.

#### High Efficiency Dissolution of Oxygen


The air drawn into the aerator is pressurized by the liquid impelled by the impeller. Both the liquid and the pressurized air are pushed toward the discharge port by the guide vane. As part of this process, the air and liquid are mixed at a pressure higher than that produced by the depth of the water. This innovation contributes to highly efficient dissolution of oxygen.

#### Air Seal Mechanism

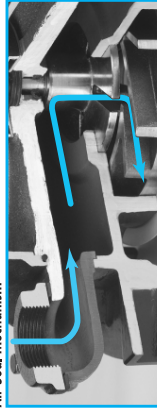

The air seal mechanism prevents pressure on the shaft seal during its operation.

#### Double Mechanical Seal & OIL LIFTER

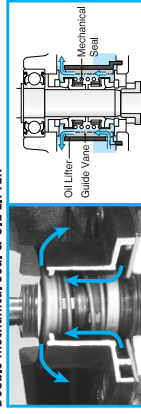

Being located in a clean environment, the mechanical seal assures reliable sealing. The OIL LIFTER stabilizes and enhances mechanical seal lubrication and cooling effect.

#### Semi-open Impeller (special)



#### Excellent Stirring Performance

The air contained in the air/liquid mixture discharged from the aerator gives buoyancy to the mixture, and the upward flow of the buoyant liquid generates convection current in the tank. The current stirs the liquid so that it may even out the oxygen translation throughout the tank.



#### Outstanding Durability

This aerator incorporates a double mechanical seal. Tsurumi's field-proven shaft seal mechanism. An Oil Lifter is also provided to extend the service life of the mechanical seal.

In addition, this aerator includes Tsurumi's proprietary air seal mechanism, which significantly extends the service life of the shaft seal mechanism.

#### Additional Features

This aerator features the same unique technologies adopted in Tsurumi's submersible pumps. These include the anti-wicking cable entry, which protects the motor from water intrusion through the cable conductors; motor protection device, which protects motor from overload; and an oil seal that protects the mechanical seal from abrasive particles.

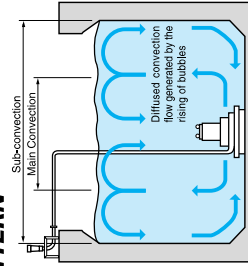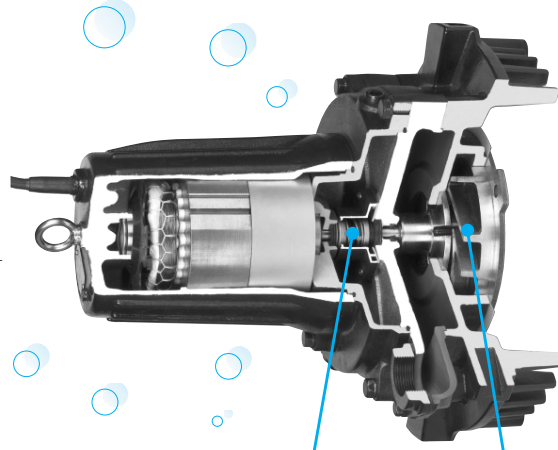

#### CONVECTION PATTERN

**Main Convection**  
Convection made by rising bubbles. (The minimum distance that must be provided between each aerator)

**Sub-convection**  
The maximum convection that can keep solids suspended to prevent sedimentation of solids.

Model	Max. Water Depth m	Main Convection φ/m	Sub-convection Circular Tank φ/m	Square Tank Side m
32TRN2.75	3.5	1.4	3.5	3
32TRN2.15	3.5	1.8	4.5	4
50TRN42.2	3.6	2.4	6	5.5
50TRN43.7	4	3	7	6.5
50TRN45.5	4	3.8	9	8
80TRN47.5	4.5	4.4	10	9
80TRN42	6	5.2	12	11
80TRN417	6	5.6	13	11.5
100TRN424	6	6.3	14.5	13
150TRN440	6	7.3	17	15

#### MAJOR STANDARD SPECIFICATIONS

Air-inlet Bore	mm	32	50	80	100	150
Treating Fluid	Type of Fluid	Wastewater and Sewage				
	Fluid Temperature	0 to 40°C				
Aerator	Structure	Semi-open Impeller (special)				
	Impeller	Double Mechanical Seal (with Oil Lifter)				
	Bearing	Double-shielded Ball Bearing				
	Impeller	410 Stainless Steel Casting				
	Air Passage	Gray Cast Iron				
Motor	Materials	Gray Cast Iron				
	Suction Cover	410 Stainless Steel Casting				
	Shaft Seal	Silicon Carbide				
	Type, Pole	Dry Type Submersible Induction Motor				
	Insulation	2, 4-pole				
No. of Outlets	Phase	Class F				
	Starting Method	Direct on Line (7.5kW and below) Star-Delta (12kW and above)				
	Protection Device (built-in)	Circuit Thermal Protector (7.5kW and below) Miniature Thermal Protector (12kW and above)				
	Lubricant	Turbine Oil (ISO VG32)				
	Materials	Frame: Gray Cast Iron Shaft: 420 Stainless Steel Cable: PVC (3.7kW and below) Chloroprene Rubber (5.5kW and above)				

#### APPLICATIONS

- Pre-aeration and aeration at wastewater treatment plant
- Supplying oxygen to water in aquarium

#### STANDARD ACCESSORIES

- Silencer & Valve Set ----- 1 set
- Screwed Flange (with Packing & Bolts / 17kW and below) ----- 1 set
- JIS 10kg/cm<sup>2</sup> Flange (with Packing & Bolts / 24kW and above) ----- 1 set

#### CABLE CABLES

Motor Output kW	200~240V		380~600V		Material	Length m
	Cores X mm <sup>2</sup>	Dia. mm	Cores X mm <sup>2</sup>	Dia. mm		
0.75	4X1.25	11.1	4X1.25	11.1	PVC	6
1.5	4X1.25	11.1	4X1.25	11.1	PVC	6
2.2	4X2	11.8	4X2	11.8	PVC	6
3.7	4X3.5	13.9	4X2	11.8	PVC	6
5.5	4X3.5	14.1	4X3.5	14.1	Chloroprene Rubber	8
7.5	4X5.5	16.8	4X5.5	16.8	Chloroprene Rubber	8
12	4X3.5	14.1	4X3.5	14.1	Chloroprene Rubber	8
	3X3.5	12.9	3X3.5	12.9	Chloroprene Rubber	8
	2X1.25	9.8	2X1.25	9.8	Chloroprene Rubber	8
17	4X5.5	16.8	4X5.5	16.8	Chloroprene Rubber	8
	3X5.5	15.2	3X5.5	15.2	Chloroprene Rubber	8
	2X1.25	9.8	2X1.25	9.8	Chloroprene Rubber	8
24	4X14	21.7	4X14	21.7	Chloroprene Rubber	10
	3X14	19.7	3X14	19.7	Chloroprene Rubber	10
	2X1.25	9.8	2X1.25	9.8	Chloroprene Rubber	10
40	4X22	28.8	4X14	21.7	Chloroprene Rubber	10
	3X22	26.1	3X14	19.7	Chloroprene Rubber	10
	2X1.25	9.8	2X1.25	9.8	Chloroprene Rubber	10





#### MODEL SELECTION

Air-inlet Bore	mm	Model	Motor Output kW	Speed (S.S.)	Starting Method	Max. Water Depth m	Air Flow Rate* Max. Water Depth	No. of Outlets	Solids Passage	Dry Weight** kg
32		32TRN2.75	0.75	3000/3600	D.O.L.	3.5	7/8	6	10	55
		32TRN2.15	1.5	3000/3600	D.O.L.	3.5	20/17	6	12	55
50		50TRN42.2	2.2	1500/1800	D.O.L.	3.6	39/38	6	12	140
		50TRN43.7	3.7	1500/1800	D.O.L.	4.0	55/60	6	12	150
		50TRN45.5	5.5	1500/1800	D.O.L.	4.0	78/79	6	15	170
80		80TRN47.5	7.5	1500/1800	D.O.L.	4.5	124/112	6	15	190
		80TRN42	12	1500/1800	Star-Delta	6.0	157/155	6	15	200
		80TRN417	17	1500/1800	Star-Delta	6.0	202/220	6	15	220
100		100TRN424	24	1500/1800	Star-Delta	6.0	388/342	8	22	435
		150TRN440	40	1500/1800	Star-Delta	6.0	528/506	8	25	583



\* The air flow rates are expressed at the standard condition. : Temperature 20°C, 1 atm  
\*\* Weights excluding cable

## AIR FLOW RATE - WATER DEPTH CURVES

The air flow rates are expressed at the standard condition, i.e. temperature of 20°C, 1 atm and may vary by up to approximately 5%.

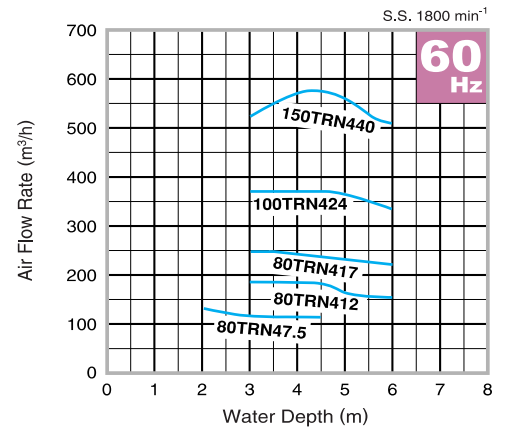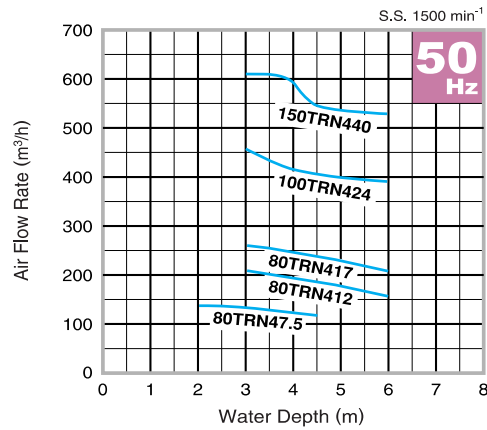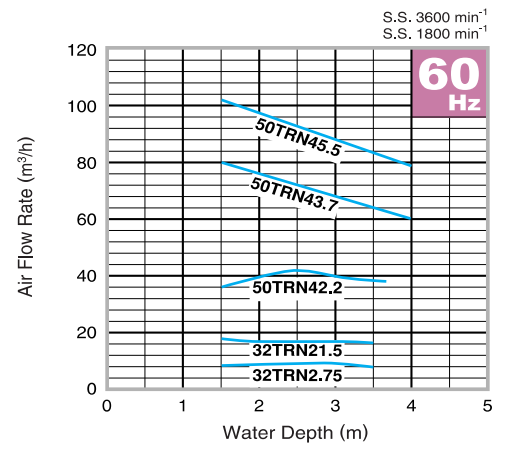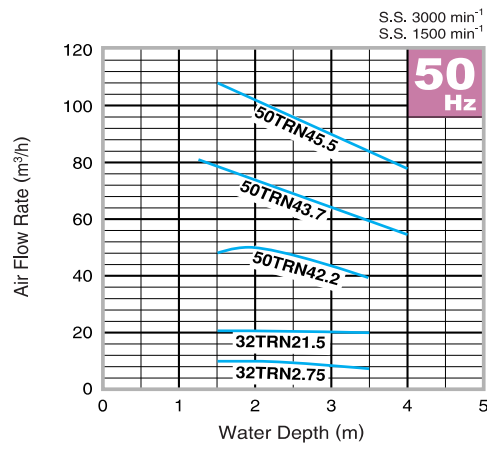


## DIMENSIONS

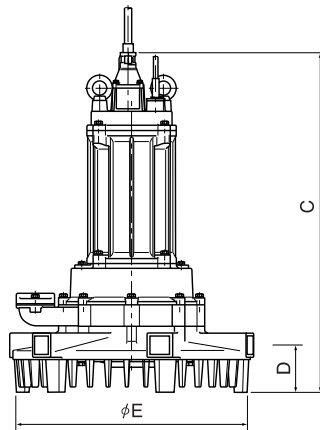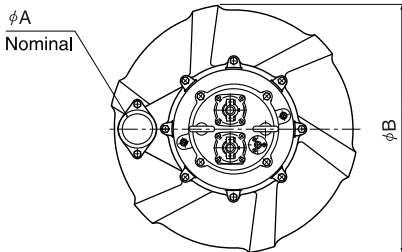

Unit: mm

MODEL	A	B	C	D	E
32TRN2.75	32	400	473	81	371
32TRN21.5	32	400	473	81	371
50TRN42.2	50	700	689	123	660
50TRN43.7	50	700	694	123	660
50TRN45.5	50	700	835	123	660
80TRN47.5	80	700	868	133	660
80TRN412	80	700	898	133	660
80TRN417	80	700	958	133	660
100TRN424	100	1000	1254	272	980
150TRN440	150	1000	1459	269	980

## Silencer & Valve Set

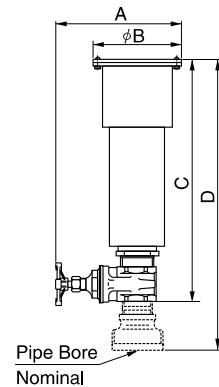

Unit: mm

Pipe Bore	A	B	C	D
φ32	180	116	275	—
φ50	230	154	370	—
φ80	245	180	—	585
φ100	345	256	—	760
φ150	448	370	—	930

Material of Silencer: PVC (24kW and below)  
Rolled Steel (40kW only)

We reserve the right to change the specifications and designs for improvement without prior notice.

**TSURUMI**  
**MANUFACTURING CO., LTD.**

Your Dealer